


Door Sensor AR-MS-101-A

Be used to install on the door frame and door panel to detect the open/close status of the door. After connecting with controller, an alarm can be triggered immediately through the controller when the door sensor detects the door abnormally

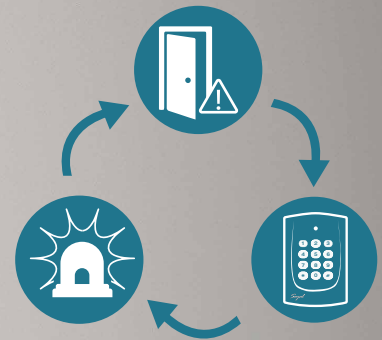

SPECIFICATION

Magnetic Door Sensor	NO
Sensing Distance	15MM - 25MM
Contact Capacity	1VA
Maximum Switching Voltage	24Vdc
Maximum Switch Current	0.1A
Maximum Powered Current	0.3A
Housing Material	ABS
Color	Beige
Dimension(mm)	12(H)X63.6(W)X14.5(D)
Operating Temperature	-20°C ~ +70°C

INSTALLATION (mm)

